



FERCO SEATING ILLUSTRATION ONLY

Product Specifications

Structure

- Combination of a wooden frame and a steel frame, upholstered with polyurethane HR foam and polyester then, covered with fabric / leatherette / leather.

Backrest and Seat

- Inner back frame is made of metal pipe upholstered with polyurethane HR foam then, covered with fabric / leather / leatherette.
- Seat unit with wood fully upholstered with polyurethane HR foam then, covered with fabric / leather / leatherette.

Panel

- Wooden Panel topped with cupholder and covered with fabric / leather / leatherette.

Recliner Mechanism

- Electrically single-motor operated.
- Push force (max.) : 1000N.
- Pull force (max.) : 1000N
- includes adapter (input) : (110V~240V. (output) : DC 29V, 1.8A).
- Operating temperature : 0° - 40 °C.

Metal, Fabric and Leatherette Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- Refer to Ferco Standard Fabrics Catalogue (Grade : A).
- Refer to Ferco Standard Leatherette Catalogue.

Safety


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations. in their last issues and particularly with safety regulations.
- Finger Proof - Recliners are attached with finger guard to reduce hazard.

Warranty

- Refer to Ferco product warranty.

Options

- Gooseneck Light.
- Aisle Light and Row Lettering.
- Square Seat Numbering & Row Lettering.
- Swivel Table / Smart Swivel Table / Double Action Swivel Table.
- Embroidery seat numbering on backrest.
- Logo Embroidery.
- USB Charging Point
- Call System Button.
- Twin Seat.
- Enclosure Panel.
- Flammability compliance with BS 5852 : 2006 section 3 ignition source 5.

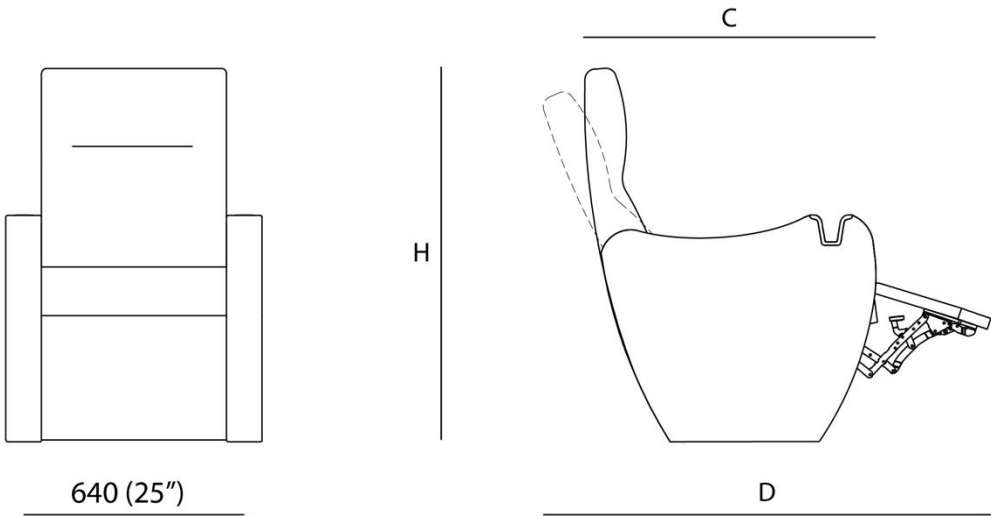

DIMENSIONS	
H	1100 (43")
C	930 (36.5")
D	1420 (56")