





FECO SEATING ILLUSTRATION ONLY

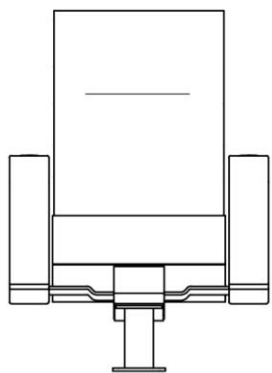

585 (23")
610 (24")

RH
FH

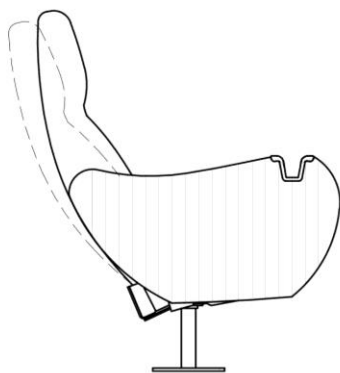

RC
FC

DIMENSIONS	
RH	1150 (45.5")
FH	1000 (39.5")
RC	840 (33.5")
FC	990 (39")

Product Specifications

Structure

- Moulded structure holding the backrest and seat made up of 6 mm Thk. metal plate and 20mm x 20mm x 2mm rectangular hollow section with interchangeable backrest pitch.

Backrest and Seat

- Inner ply is made of 15 mm thick press curved plywood, covered with high resilience foam of 85-130mm thickness and upholstered in leatherette / leather / fabric.
- Seat unit with 18mm compressed plywood fully covered with high resilience foam of 105 - 145mm thickness and upholstered in leatherette / leather / fabric.

Armrests and Panel

- Fixed armrest with high resilience foam upholstered in leatherette / leather / fabric.
- Wooden panel covered with foam, upholstered in leatherette / leather / fabric with a built-in cup holder.

Legs

- Legs are of lateral slope design made of a rectangular hollow section of 78mm x 38mm x 2.3mm Thk. continuously welded to 8mm thickness steel plate.

Metal and Upholstery Finishing

- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabrics / leatherette / leather charts.

Fire Resistance

- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Warranty

- Refer to Ferco product warranty.

Options

- Single seat / Linked seat
- Rectangular seat numbering
- Row lettering type E with Aisle light
- Row lettering type A
- Embroidery Logo
- Embroidery seat numbering
- Rocker Backrest
- Foot Cover
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5