



MBO TROPICANA CINEMA, MALAYSIA

Product Specifications

Structure

- Combination of a wooden panel frame and a steel frame, covered with foam then, upholstered in leatherette / leather / fabric.

Backrest and Seat

- Inner back frame is made of plywood and solid wood frame covered with high resilience foam, upholstered in leatherette / leather / fabric.
- Seat unit with 13mm compressed plywood fully covered with high resilience foam of 110 - 145mm thickness and upholstered in leatherette / leather / fabric. Detachable leatherette / leather / fabric seat & footrest padded cover added on top.

Panel

- Wooden panel covered with foam and upholstered in leatherette / leather / fabric with a built-in cup holder.

Recliner Mechanism

- Electrically single-motor operated.
- In compliance with EMC 2014/30/EU & LVD 2014/35/EU.
- Auto-return function.
- Push force (min to max.) : 750N – 4000N.
- Pull force (min to max.) : 750N – 4000N.
- Includes adapter (input) : 110V~240V (output) : DC 29V, 1.8A.
- Operating temperature : 0° - 40 °C.

Metal and Fabric Finishing


- Zigzag lever systems that ensure the backrest and footrest are being operated smoothly.
- All metal parts exposed shall be stripped and cleaned with iron phosphate, hot water rinsed and then chromic acid rinsed.
- All metal parts are coated with an epoxy finish minimum of 60 microns for outdoor use.
- Refer Ferco standard fabrics / leatherette / leather charts.

Fire Safety


- Fire Safety - Flammability compliance with California Bulletin 117 and international regulations in their last issues and particularly with safety regulations.
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 0 & 1.

Option for Privata

- Reading light
- Stainless steel hook
- Smart hook
- Flammability compliance with BS 5852 : 2006 Section 3 Ignition Source 5

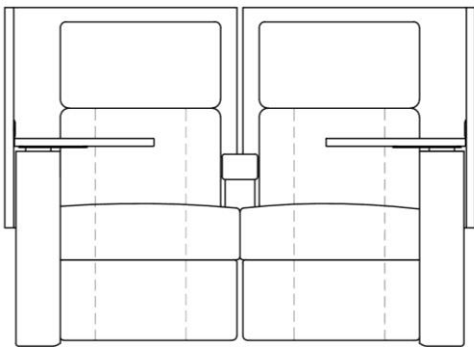

1585 (62.5)

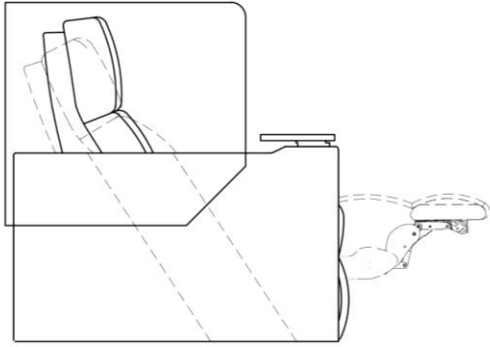

C

DIMENSIONS	
H	1140 (45")
C	1190 (47")